

PRODUCT INFORMATION

Variable side bracket

For the flexible on-site use the variable side bracket for 1-board or 2-board use was developed. A fast and safe reaction to local circumstances with one component. The conversion from 1-board to 2-board and vice versa is made by an easy and solide connector system.


Code	Articel	Dimension (cm)	Weight
5FSLN61000	Variable bracket SL	H32, W64	5.4 kg
5F00202234*	Variable bracket quadro	H32, W64	4.9 kg
5FMPP36500	Variable bracket contur/futuro TS	H41, W75	5.6 kg
5F00317473	Variable bracket futuro US	H39, W73	5.5 kg

*If required the bracket can be complemented with a connecting spigot for inboard side protection.


ADVANTAGES

- ✓ fast and flexible
- ✓ cost savings
- ✓ lower material expense

APPLICATION

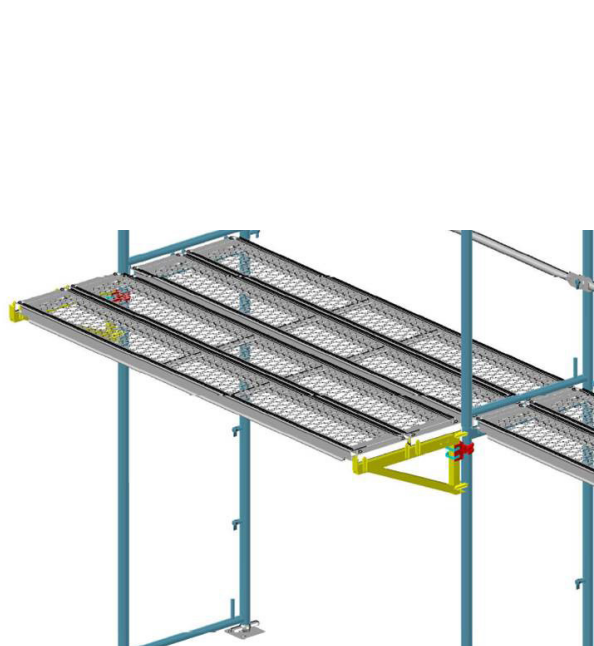

use of variable bracket SL
2-board

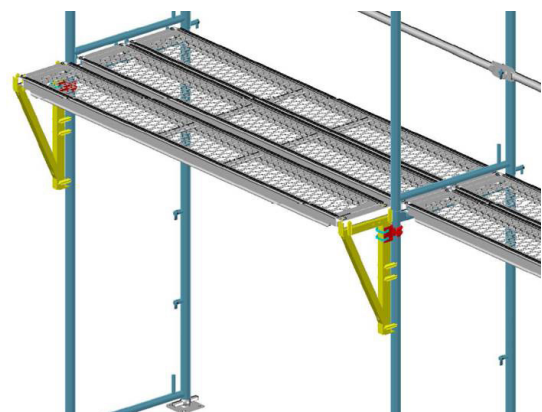

use of variable bracket SL
1-board